



## **Veloped Transport Bag User Guide**


The Veloped transport bag includes a main bag for the Veloped frame and two smaller bags for the front- and rear wheels. The transport bag fits all Veloped models.

Fits all Veloped models.



### **1 Open mainbag.**

Unzip the storage bag (that also serves as the front wheel bag) and unpack the main transport bag and the rear wheel bag.

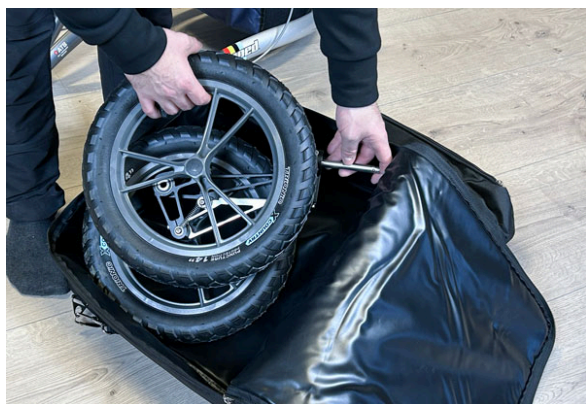

### **2 Pack the front wheels.**

Detach the front Climbing Wheel from the Veloped frame and pack into the bigger wheel bag and close the zipper.




### **3 Pack the rear wheels.**

Detach the two rear wheels from the Veloped frame and pack them into the smaller wheel bag and close the zipper.



#### 4 Spread out the main bag

Unzip the full length of the main bag's zipper and unfold the bag on the floor. Place the frame on the center section of the main bag and place the bigger front wheel bag under the seat of the Veloped (between the two rear vertical frame tubes).

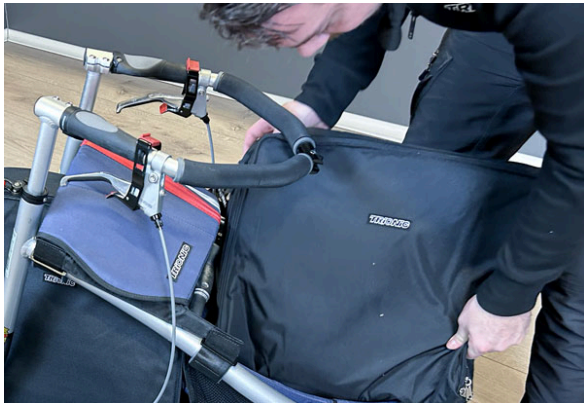


#### 5 Add the wheelbags.

Loosen the height adjustment quick-release levers and raise the grip bar a little, place the smaller rear wheel bag on top of the Veloped basket and then lower the grip bar to its bottom position.




#### 6 Close bag.

Pull the "flaps" of the main bag over the Veloped and close the zipper.

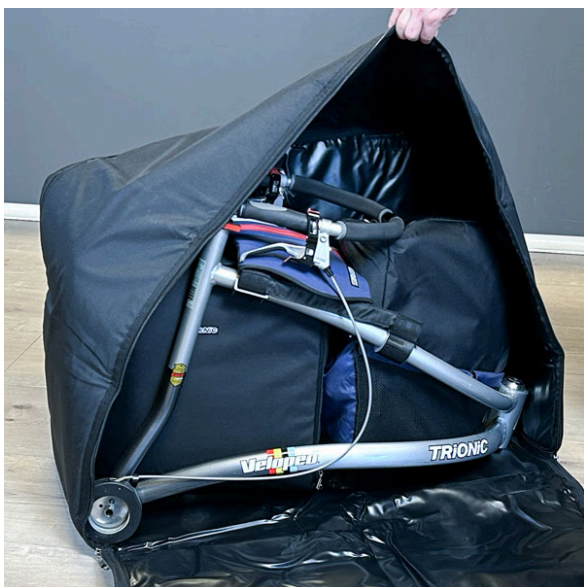

#### 7 This photo shows the Veloped as correctly packed.

### **Packing instructions**



Scan the QR-code with your smart phone or device to view video instructions.